



GCY198

Side-pressure Sliding Window

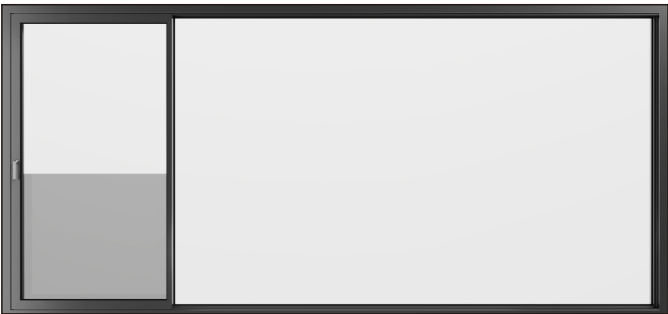

Opening Types

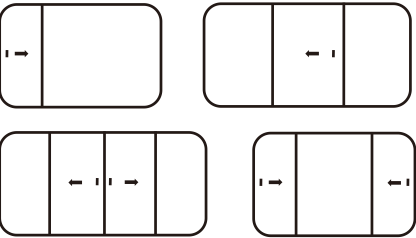

Safety Railing

Full protection allies with panoramic views.



LEAWOD Handle

Customized handle is easy to operate.



Retractable Screen

When closed, the screen is flush with the window frame, not blocking the view and providing improved transparency for better natural lighting.



Multi-color Configuration

We can customize colors according to customer requirements, with more than 100 colors currently available.



Seamless Welding


Adopts the automobile manufacturing to windows and doors by laser welding.



Non-return Drainage System

It can prevent bugs and pests from entering.

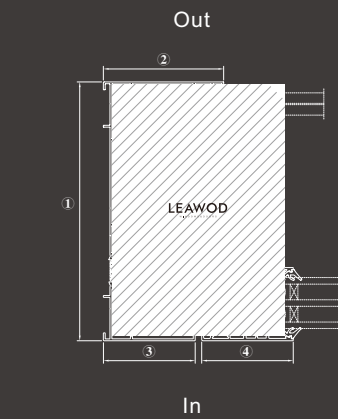

Section	Item	Standard Configuration	
 ① Depth of Profile: 198mm ② Frame Width: 92mm ③ Frame Width: 70mm ④ Sash Width: 70mm	Profile	Profile Thickness:198mm Thickness: ≥1.50mm	
	Screen	Retractable Invisible Screen (High-Strength Fiberglass Mesh)	
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying	
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder	
		Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions	
	Glass	Fixed: 6mm+27Ar+6mm Glass Rabbet:50mm	
		Sash: 6mm+27Ar+6mm Glass Rabbet: 49mm	
		Guardrail Glass: 8mm+1.52PVB+8mm	
	Hardware	Glass Sash	Handle: LEAWOD
			Transmission: LEAWOD
	Technologies	Aluminum	Seamless Welding/Cavity Foam Filling of Under-rail of Frame/Non-return Drainage System