



GLW70AM-AU

Outward Opening Door

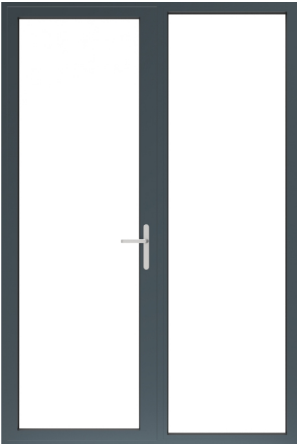

Opening Types

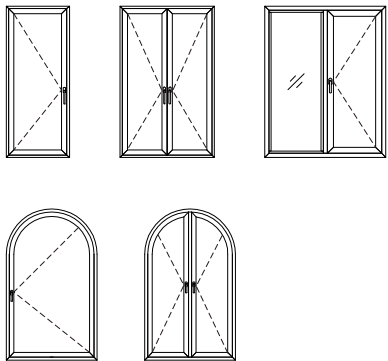

Non-return Drainage System

Non-return drainage system prevent water and pests from entering.



Multi-color Configuration

We can customize colors according to customer requirements, with more than 100 colors currently available.



Argon Filling Glass

The glass is filled with argon to provide better insulation while preventing fogging.



Germany HOPPE Handle

The handle imported from Germany better for anti-theft.



Seamless Welding

Seamless Welding of Sash and Frame, providing greater strength. Ultra-Narrow Frame Design make more beautiful appearance.



Germany G-U Transmission

A premium hardware solution that is smooth, quiet, durable, and provides high anti-theft security performance.



Section	Item	Standard Configuration	
In Out ① Depth of Profile: 70mm ② Visible Width: 89mm ③ Frame Width: 62mm ④ Sash Width: 27mm ⑤ Frame Width: 34mm ⑥ Sash Width: 55mm	Profile	Profile Thickness:115mm Thickness: ≥1.80mm	
	Screen Door	-	
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying	
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder	
		Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions	
	Glass	Fixed: 5mm+20Ar+5mm Glass Rabbet:40mm	
		Sash: 5mm+20Ar+5mm Glass Rabbet:37mm	
Hardware	Glass Sash	Handle: Germany HOPPE	
		Transmission: Germany G-U	
Technologies	Aluminum	Seamless Welding of Sash and Frame/Cavity Foam Filling of Frame and Sash/Non-return Drainage System	