


GTL140-AU

Triple Tracks Sliding Door



Opening Types

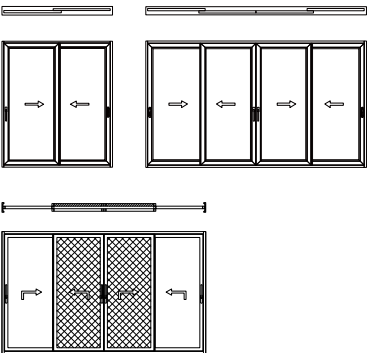


Designed for large openings

Supports a load capacity of 1000kg per leaf to ensure stable operation of oversized doors, providing safety and deformation-free performance.



Reinforced Central Post Design

It can significantly enhance the overall structural strength and stability, contributing to improved airtightness and energy efficiency.

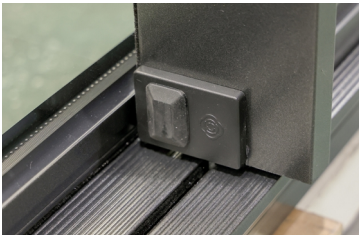

Hidden Frame and Tack Design

The door frame is fully recessed into the wall, with no protruding frames visible, creating a seamless appearance.



LEAWOD Handle

LEAWOD Customized Handles, minimalist design for smoother operation.



Non-return Drainage System


It can prevent bugs and pests from entering.



Multi-color Configuration

We can customize colors according to customer requirements, with more than 100 colors currently available.

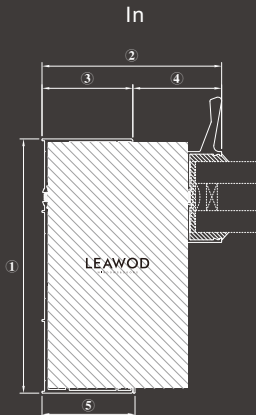

Section	Item	Standard Configuration	
 ① Depth of Profile: 140mm ② Visible Width: 99mm ③ Frame Width: 50mm ④ Sash Width: 49mm ⑤ Frame Width: 51mm	Profile	Profile Thickness: 140mm Thickness: ≥2.0mm	
	Screen	-	
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying	
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder	
		Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions	
	Glass	Fixed: 5mm+27Ar+5mm Glass Rabbet: 45mm	
		Sash: 5mm+27Ar+5mm Glass Rabbet: 45mm	
Hardware	Handle: LEAWOD(Silver)		
	Transmission: LEAWOD		
Technologies	Aluminum	Bottom Track Frame Filling	

① Depth of Profile:	140mm
② Visible Width:	99mm
③ Frame Width:	50mm
④ Sash Width:	49mm
⑤ Frame Width:	51mm