

GTL140i

Intelligent Sliding Door



Opening Types

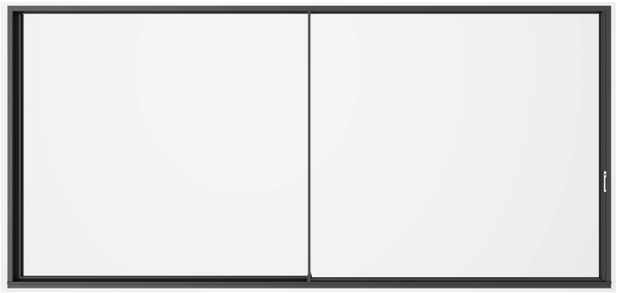



Designed for Large Openings

Supports a load capacity of 1000kg per leaf to ensure stable operation of oversized doors, providing safety and deformation-free performance.




Ultra-narrow Frame

Maximize spatial transparency, minimize the door's visual presence, and make the space feel more open.



Recessed bottom track

Recessed bottom track keeps the floor completely flush, enabling barrier-free access.



Non-return Drainage System

It can prevent bugs and pests from entering.



LEAWOD Handle


LEAWOD Customized Handles, minimalist design for smoother operation.



Smart Configuration

Electric drive, IR sensor, and dual-mode operation ensures normal use even when power is cut.



Section	Item	Standard Configuration
In  Out ① Depth of Profile: 140mm ② Frame Width: 68mm ③ Frame Width: 67mm ④ Sash Width: 49mm ⑤ Visible Width: 116mm	**Profile**	Profile Thickness: 140mm Thickness: ⩾2.0mm
	Screen	None
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder
		Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions
	Glass	Fixed: 10mm+20Ar+10mm Glass Rabbet: 45mm
	Hardware	Handle: LEAWOD
		Transmission: LEAWOD
	Technologies	Bottom Track Frame Filling
	Power Control System	Fingerprint Lock/Infrared Anti-pinch Function/Manual&Auto Electronic Lock