



GTL162/GTL240

Aluminum Lifting & Sliding Door

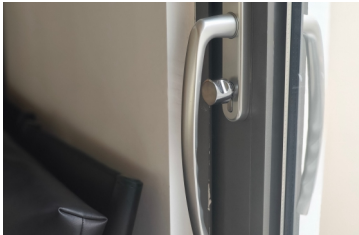

Opening Types

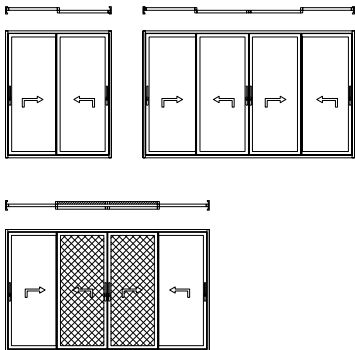

Germany HOPPE Lifting Handle

It features a gentle rebound function, automatically decelerating and cushioning when you release the handle, providing greater safety and more reassuring.



Argon Filling Glass

Double-layered tempered insulating glass, filled with inert gas, enhances sound insulation and thermal performance.




Hidden Drainage

The hidden drainage structure combined with a water-blocking lower track forms a "prevention-drainage" closed loop.



Strike plate

Adopt Germany G-U lock point system.

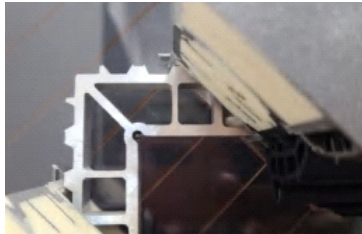

Reinforced Angle


More safety, strong and durable.



High-Strength Glass-to-Profile Connection

Pa66 nylon thermal break strips and a multi-cavity structure are used to effectively block energy transfer between indoors and outdoors.

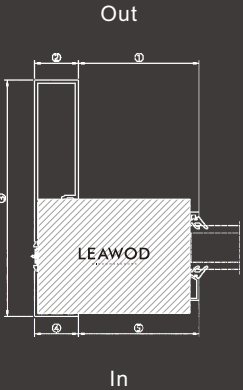

Section	Item	Standard Configuration	
 Out In ① Sash Width: 83mm ② Frame Width: 30mm ③ Depth of Profile: 162mm ④ Frame Width: 30mm ⑤ Sash Width: 83mm	Profile	Profile Thickness:162mm Thickness: 2.0mm	
	Sash	Optional:GSM60External Sliding Screen Door(48 Mesh High Transmittance Screen/304 Stainless Steel Screen/316 Stainless Steel Screen)	
	Surface Treatment	Autria Tiger Powder Spraying	
	Glass	Fixed: 6mm+27Ar+6mm Glass Rabbet:50mm	
		Sash: 6mm+20Ar+6mm / 6mm+27Ar+6mm Glass Rabbet:38mm / 50mm	
	Hardware	Handle	LEAWOD Optional:GermanyHOPPE
		Transmission	LEAWOD Optional:GermanyG-U
	Technologies	Sash: Seamless Welding Frame Sill: Cavity Foam Filling	