



GXN110P2T

Micro Ventilation Window

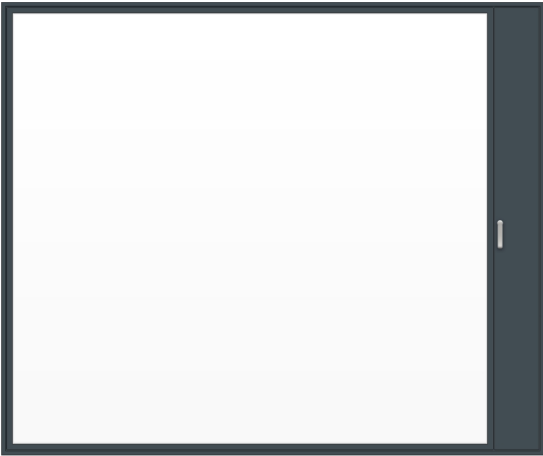

Opening Types



Germany G-U Locking Point

Imported from Germany, providing reliable and stable locking mechanism.



Flat-panel Design

The sash and frame are located on the same plane, there is no height difference.



Extra-large Fixed Glass

To provide customers with a transparent vision experience.



Germany HOPPE Handle

Imported from Germany. The handle automatic locked better for anti-theft.



Anti-fall Pad

Solves the problem of the sash corner drop.



48 Mesh Screen

It is equipped with high permeability screen, which can prevent mosquitoes when ventilation.



Section	Item	Standard Configuration
In ② ③ ① ④ ⑤ ⑥ LEAWOD Out ① Profile Thickness: 110mm ② Frame Width: 15mm ③ Sash Width: 238mm ④ Frame Width: 54mm ⑤ Sash Width: 17.5mm ⑥ Visible Width: 131mm	Profile	Profile Thickness:110mm Thickness: ≥1.8mm
	Screen	48 Mesh High Transmittance Screen
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder
	Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions	
	Glass	Fixed: 5mm+20Ar+5mm Glass Rabbet:40mm
Hardware	Transmission:SIEGENIA	Sash Handle: HOPPE/LEAWODX Screen Handle:LEAWOD
Technologies		Frame&Sash Seamless Weld//Frame :Foam filling/Sash:No Foaming/ Integrally Welded Glazing Bead /Flush Design