



GXW120

Outward-opening Window with Integrated Screen

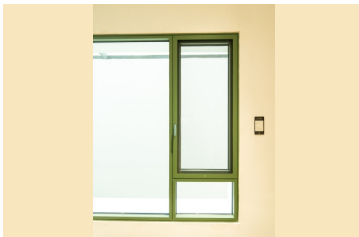


Opening Types



Flush Frame and Sash

The flush design of the interior frame and sash gives the window a smoother and more aesthetically pleasing appearance.

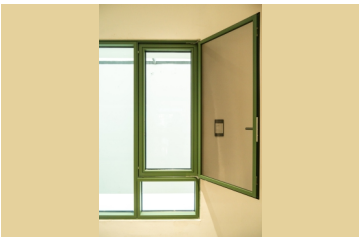

Integrated screen and window

Improved aesthetics and sealing, space-saving, and easy cleaning.



Triple Glazing with Two Insulating Air Spaces

Triple glazing with two air cavities for enhanced energy efficiency, and glass upgrades are also available to meet specific requirements.




Fully Welded Glazing bead

Strengthens corner structure and prevents warping over time, boosts sealing and installation stability.



Non-return Drainage System


Hidden drainage channels and a unique cavity design use inside-outside pressure differences to let rainwater drain away freely without blockage.

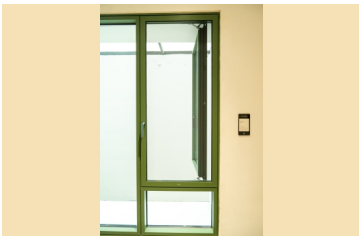

Concealed hinges

Simple and elegant, improving sealing, anti-theft performance, and supporting large-angle flexible opening.



Section	Item	Standard Configuration
In  Out ① Profile Thickness: 120mm ② Visible Width: 71mm ③ Frame Width: 15mm ④ Sash Width: 50mm ⑤ Frame Width: 32mm ⑥ Sash Width: 61mm ⑦ Visible Width: 99mm	Profile	Profile Thickness: 120mm Thickness: ≥1.8mm
	Screen	48 Mesh High Transmittance Screen
	Surface Treatment	Standard Powder: Autria Tiger Powder Spraying
		Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder
	Glass	Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions
		Fixed: 5mm+20Ar+5mm Glass Rabbet: 40mm Sash: 5mm+20Ar+5mm Glass Rabbet: 40mm
	Hardware	Sash Handle: LEAWOD
		Sash Transmission: SIEGENIA
		Screen Handle: HOPPE Screen Transmission: SIEGENIA
	Technologies	Frame Sash: Seamless Welding/Frame :Foam filling/Sash: No Foaming/ Integrally Welded Glazing Bead