



GZW78

Folding Door

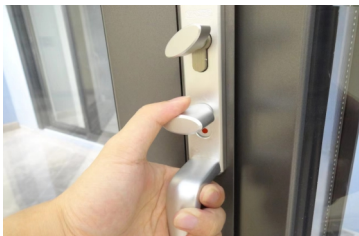

Opening Types

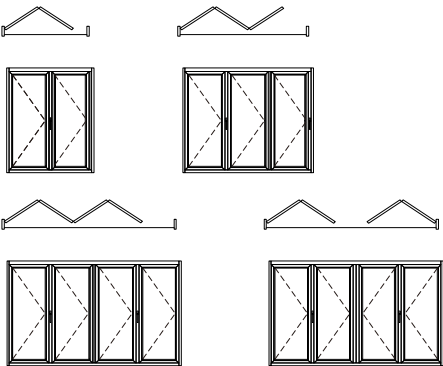

Press to Open

Just gently press, you can realize the opening of the sash, the handle and lock in one.



KERSSENBERG Hardware Systems

Imported KERSSENBERG hardware system, with strong stability.



High Strength Pulley

The high-strength wheels are able to withstand the huge weight and provide smooth operation.



Dual Tracks Design

Two metal tracks provide a silky opening and closing experience.



Tight Folding

The sashes are folded tightly together when door is opened.



Waterproof Sill

The height of the threshold effectively prevents water from entering the room.



Section	Item	Standard Configuration
In Out ① Depth of Profile: 78mm ② Visible Width: 75mm ③ Frame Width: 55mm ④ Sash Width: 20mm ⑤ Frame Width: 43.5mm ⑥ Sash Width: 28mm	Screen	-
	Hardware	Door handle: KERSSENBERG Transmission: KERSSENBERG
	Glass	Sash: 5mm+15Ar+5mm Glass rabbet: 34mm
	Surface Treatment	Austria TIGER powder spraying
	Process	Sash: Seamless welding / no foam filling Frame: Non-whole welding / no foam filling
	Profile	Main parts thickness 2.2mm
	Special Shape	-
Technologies	Whole spraying/seamless welding	