




MXN100


WOOD CLAD ALUMINUM
TILT&TURN WINDOW

内开内倒窗

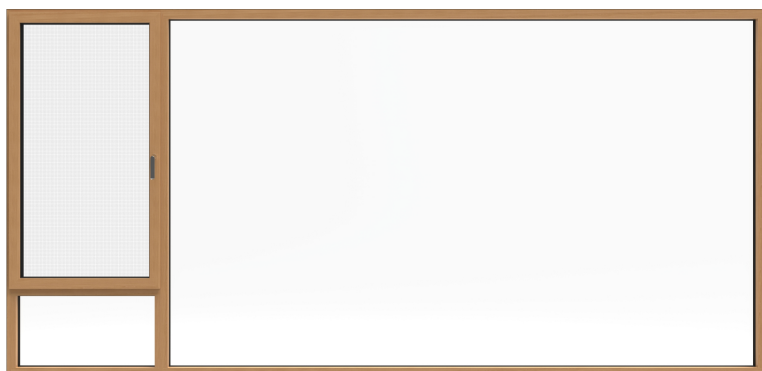

Opening Types

开启方式

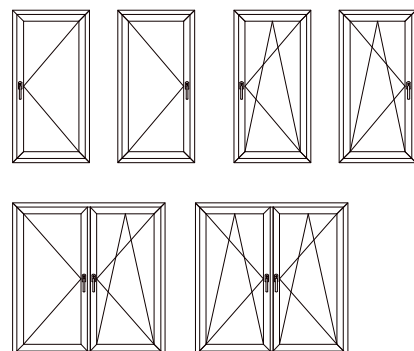

Item	Configuration		类型	参数	
Wood Clad Aluminum Composite Profile	Profile Thickness:100mm Screen: Inward-opening Screen (48Mesh High-visibility mesh)		木铝复合型材	截面厚度：100mm 纱窗：内平开纱窗(48目高透纱网)	
Aluminum Alloy Profile	Thickness: ≥1.80mm Standard Powder: Autria Tiger Powder Spraying Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions		铝合金型材	壁厚：≥1.80mm 粉末标配：奥地利老虎粉末 粉末选配：耐候10年/15年含氟粉末/耐候20年氟碳粉末 粉末建议：沿海地区/强紫外线照射地区采用选配配置	
Wood Profile	Thickness: Frame:7.6mm Sash:16mm Standard Wood Species: American Oak Optional Wood Species:China Chestnut / Indonesian Merbau / Burmese Teak / African Padauk		木型材	厚度：框：7.6mm；扇：16mm 木种标配：美国橡木 木种选配：国产栗木/印尼菠萝格/缅甸柚木/非洲紫檀木	
Glass	Fixed:5mm+27Ar+5mm Glass Rabbet:50mm Sash:5mm+27Ar+5mm Glass Rabbet:45mm		玻璃	固玻：标配5mm+27Ar+5mm 玻璃槽口：50mm 扇玻：标配5mm+27Ar+5mm 玻璃槽口：45mm	
Hardware	Glass Sash	Handle: Germany HOPPE Transmission:Austria MACO (Concealed Hinges)	五金配置	玻扇	执手：德国HOPPE 传动：奥地利MACO <隐藏合页>
	Mosquito Net	LEAWOD		纱扇	LEAWOD定制
Technologies	Aluminum Alloy	Sash Seamless Welding/Wood Sash Full-surface Spray Coating/Non-return Drainage System/R7 Round Corner	工艺	铝合金	扇无缝整体焊接、扇木材整体喷涂、地漏式排水、安全圆角
	Wood	Three times of primer and two times of finish waterborne paint Whole Spraying		木材	三底两面环保水性漆 整体喷涂

