




MXN120


WOOD CLAD ALUMINUM
TILT&TURN WINDOW

内开内倒窗

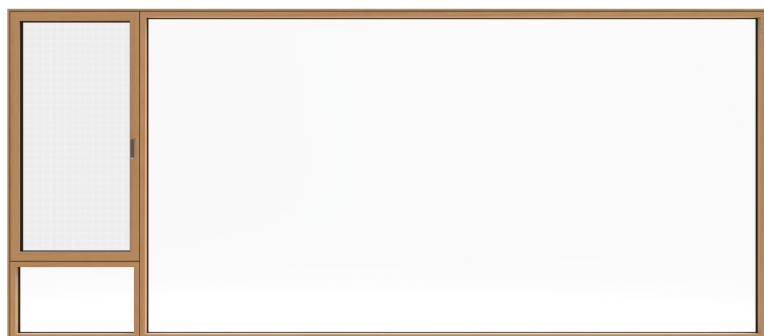

Opening Types

开启方式

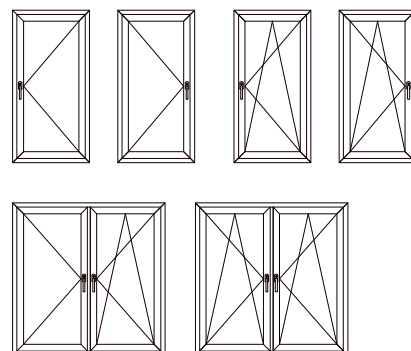

Item	Configuration		类型	参数	
Wood Clad Aluminum Composite Profile	Profile Thickness:121mm Screen: Inward-opening Screen (48Mesh High-visibility mesh)		木铝复合型材	截面厚度: 121mm 纱窗: 内平开纱窗(48目高透纱网)	
Aluminum Alloy Profile	Thickness: ≥1.80mm Standard Powder: Autria Tiger Powder Spraying Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions		铝合金型材	壁厚: ≥1.80mm 粉末标配: 奥地利老虎粉末 粉末选配: 耐候10年/15年含氟粉末/耐候20年氟碳粉末 粉末建议: 沿海地区/强紫外线照射地区采用选配配置	
Wood Profile	Thickness: Frame:28.7mm Sash:16mm Standard Wood Species: American Oak Optional Wood Species: China Chestnut / Indonesian Merbau / Burmese Teak / African Padauk		木型材	厚度: 框: 28.7mm; 扇: 16mm 木种标配: 美国橡木 木种选配: 国产栗木/印尼菠萝格/缅甸柚木/非洲紫檀木	
Glass	Fixed:5mm+27Ar+5mm Glass Rabbet:50mm Sash:5mm+27Ar+5mm Glass Rabbet:45mm		玻璃	固玻: 标配 5mm+27Ar+5mm 玻璃槽口: 50mm 扇玻: 标配 5mm+27Ar+5mm 玻璃槽口: 45mm	
Hardware	Glass Sash	Handle: Germany HOPPE Transmission: Austria MACO (Concealed Hinges)	五金配置	玻扇	执手: 德国HOPPE 传动: 奥地利MACO <隐藏合页>
	Mosquito Net	LEAWOD		纱扇	LEAWOD定制
Technologies	Aluminum Alloy	Seamless Welding/Frame Cavity Foam Filling/Wood Sash Full-surface Spray Coating/Non-return Drainage System /R7 Round Corner	工艺	铝合金	无缝整体焊接、框整腔填充、扇木材整体喷涂、地漏式排水、安全圆角
	Wood	Three times of primer and two times of finish waterborne paint Whole Spraying		木材	三底两面环保水性漆 整体喷涂

