




MXW130


WOOD CLAD ALUMINUM
CSAEMENT WINDOW

外开窗

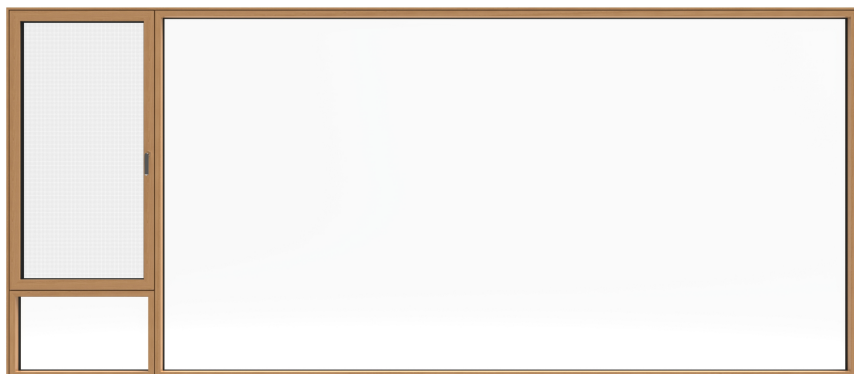

Opening Types

开启方式

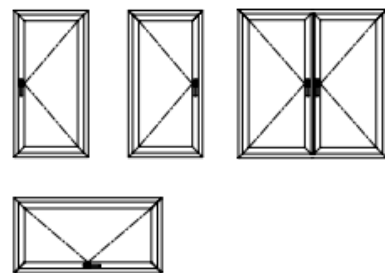

Item	Configuration		类型	参数	
Wood Clad Aluminum Composite Profile	Profile Thickness:130mm Screen: Inward-opening Screen (48Mesh High-visibility mesh)		木铝复合型材	截面厚度：130mm 纱窗：内平开纱窗(48目高透纱网)	
Aluminum Alloy Profile	Thickness: ≥1.80mm Standard Powder: Autria Tiger Powder Spraying Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions		铝合金型材	壁厚：≥1.80mm 粉末标配：奥地利老虎粉末 粉末选配：耐候10年/15年含氟粉末/耐候20年氟碳粉末 粉末建议：沿海地区/强紫外线照射地区采用选配配置	
Wood Profile	Thickness: Frame:31mm Sash:14.4mm Standard Wood Species: American Oak Optional Wood Species: China Chestnut / Indonesian Merbau / Burmese Teak / African Padauk		木型材	厚度：框31mm 扇14.4mm 木种标配：美国橡木 木种选配：国产栗木/印尼菠萝格/缅甸柚木/非洲紫檀木	
Glass	Fixed:5mm+27Ar+5mm Glass Rabbet:50mm Sash:5mm+20Ar+5mm Glass Rabbet:41mm		玻璃	固玻：标配5mm+27Ar+5mm 玻璃槽口：50mm 扇玻：标配5mm+20Ar+5mm 玻璃槽口：41mm	
Hardware	Glass Sash	Handle: LEAWOD Transmission: Germany SIEGENIA	五金配置	玻扇	执手：LEAWOD 传动：德国SIEGENIA
	Mosquito Net	Handle: LEAWOD Transmission: Germany G-U		纱扇	执手：LEAWOD 传动：德国G-U

Technologies	Aluminum Alloy	Sash Seamless Welding/Non-return Drainage System/R7 Round Corner	工艺	铝合金	扇无缝焊接/地漏式排水、安全圆角
	Wood	Three times of primer and two times of finish waterborne paint Whole Spraying		木材	三底两面环保水性漆 整体喷涂

