




MPN 105T


WOOD CLAD ALUMINUM
MICRO-VENTILATION WINDOW

微通风窗

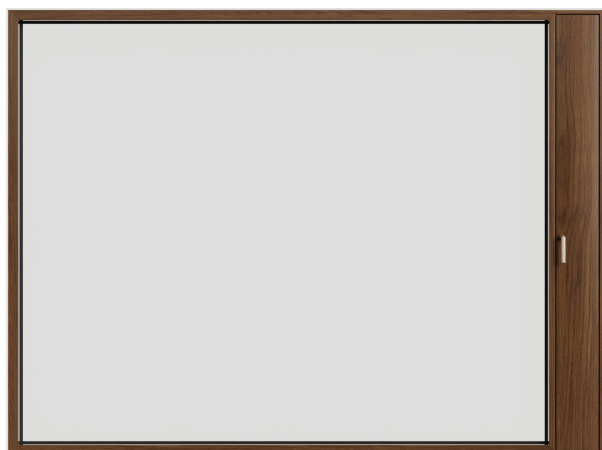


Opening Types

开启方式

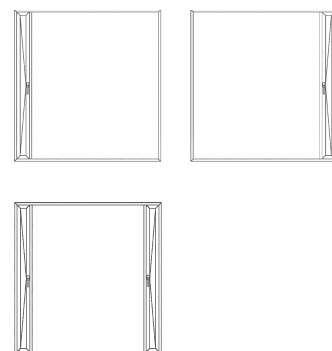

Item	Configuration	类型	参数
Wood Clad Aluminum Composite Profile	Profile Thickness:106mm Screen: Fixed Semi-concealed Screen	木铝复合型材	截面厚度：106mm 纱窗：固定半隐纱窗
Aluminum Alloy Profile	Thickness: ≥1.80mm Standard Powder: Autria Tiger Powder Spraying Optional Powder: 10/15-Year Weathering-Resistant Fluorocarbon Powder or 20-Year Weathering-Resistant Fluorocarbon Powder Powder Recommendation: Optional Configurations for Coastal Areas/High UV-exposure Regions	铝合金型材	壁厚：≥1.80mm 粉末标配：奥地利老虎粉末 粉末选配：耐候10年/15年含氟粉末/耐候20年氟碳粉末 粉末建议：沿海地区/强紫外线照射地区采用选配配置
Wood Profile	Thickness: 18mm Standard Wood Species: American Oak Optional Wood Species: China Chestnut / Indonesian Merbau / Burmese Teak / African Padauk	木型材	厚度：18mm 木种标配：美国橡木 木种选配：国产栗木/印尼菠萝格/缅甸柚木/非洲紫檀木
Glass	Fixed:5mm+20Ar+5mm Glass Rabbet:40mm	玻璃	固玻：5mm+20Ar+5mm 玻璃槽口：40mm
Hardware	Glass Sash Handle: Germany HOPPE Transmission: Germany WINKHAUS	五金配置	玻扇 执手：德国HOPPE 传动：温克豪斯


Technologies	Aluminum Alloy	Seamless Welding/Frame Cavity Foam Filling/Wood Sash Full-surface Spray Coating/Non-return Drainage System /R7 Round Corner	工艺	铝合金	无缝整体焊接、框整腔填充、扇木材整体喷涂、地漏式排水、安全圆角
	Wood	Three times of primer and two times of finish waterborne paint Whole Spraying		木材	三底两面环保水性漆 整体喷涂

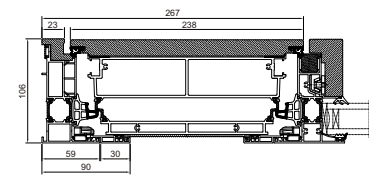

Removable insect screen —keeps mosquitoes and bugs out and is easy to replace
可拆式纱窗，防蚊防虫易更换

Multi-cavity structure provides greater stability
多腔体结构更稳定

Cavity filling to prevent water seepage
腔体填充防渗水

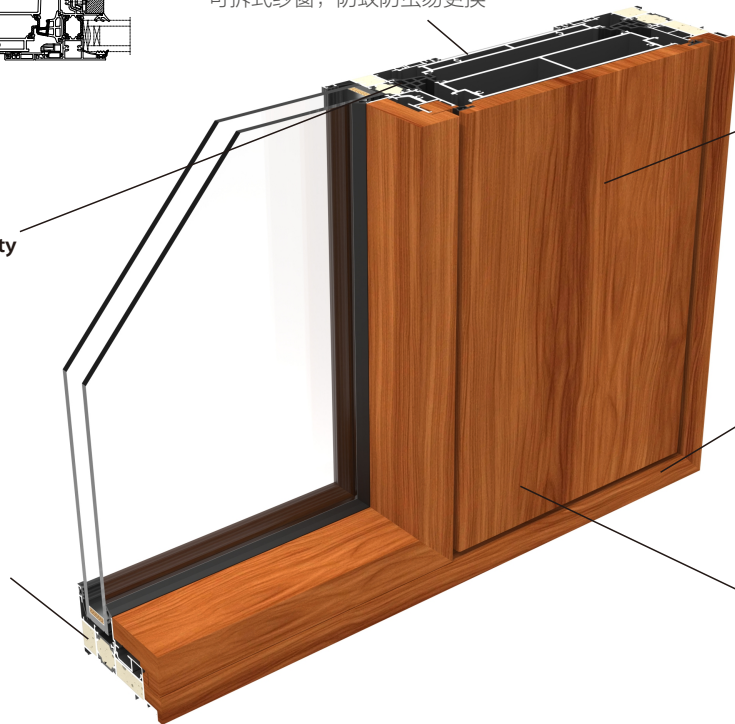

Globally sourced premium hardwoods (e.g., oak, teak, Padauk) with customizable colors
精选全球优质的硬木，如：橡木、柚木、紫檀木等
可定制颜色

Fully welded frame +multiple sealing layers for a more stable structure and better sealing performance
整体焊接框架+多道密封，结构更稳定，密封性能更高

Inward-opening, small sash for fall-prevention safety
内开、小扇，防坠安全